

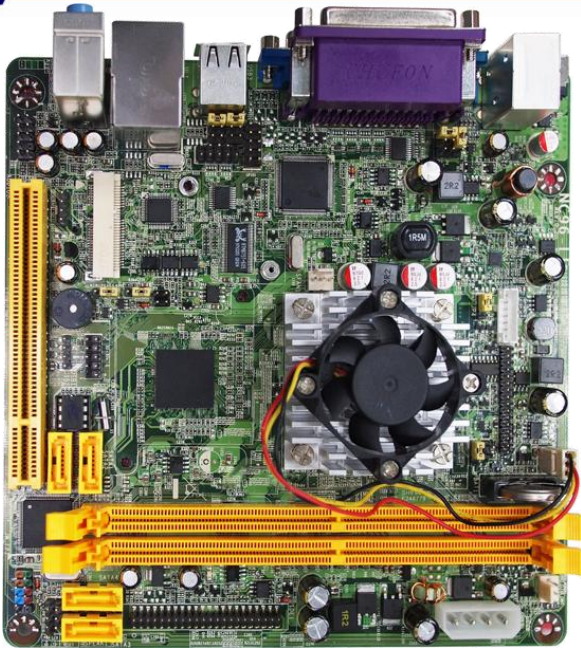


Mainboard Diagram

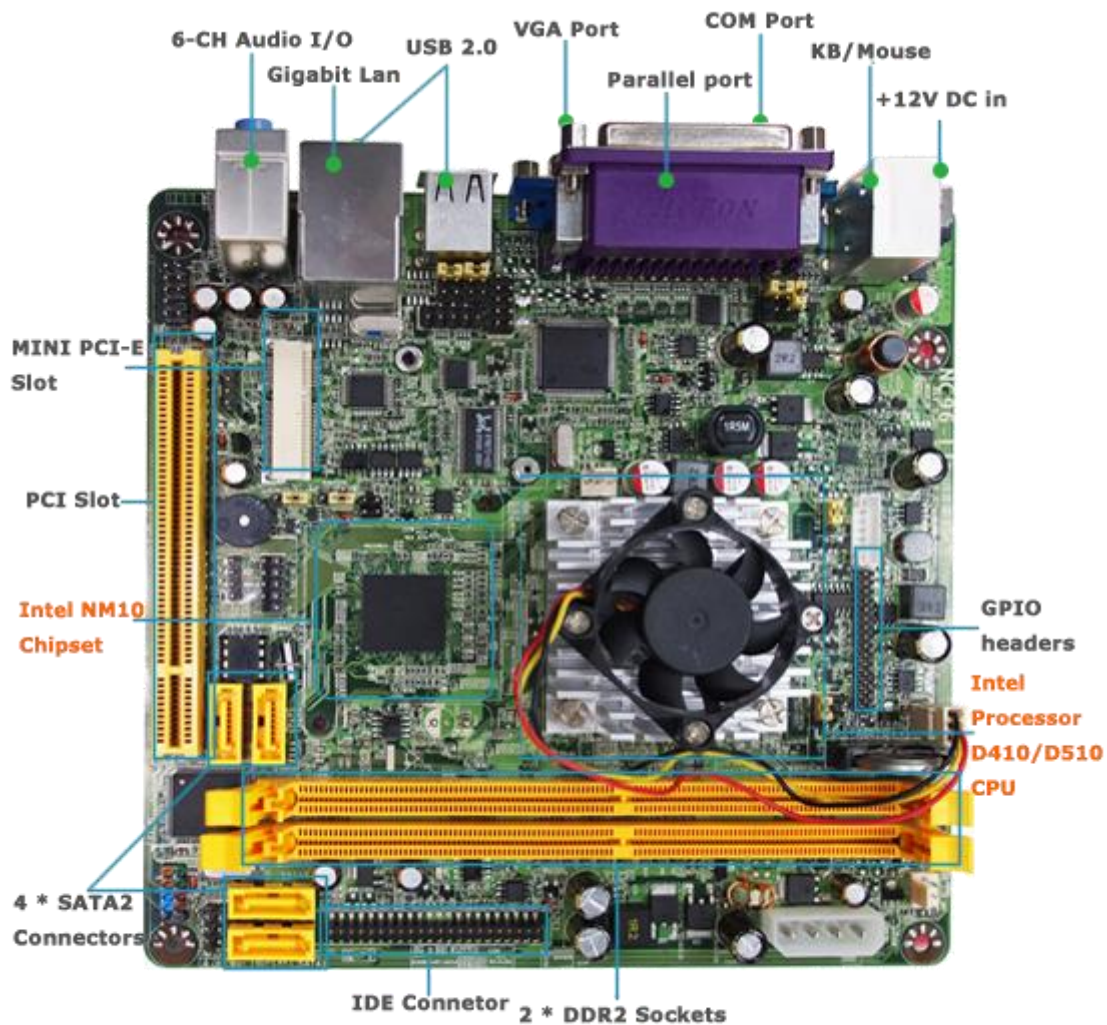

NC96-410-LF / NC96-510-LF

1. Intel Processor D410/D510 + NM10 Chipset
2. Support INTEL[®] Processor D410 Single Core CPU / D510 Dual Core CPU
3. Support 3Gb/s SATA II with RAID 0, 1, 0+1, JBOD
4. Support Dual Channel DDR II 800
5. Supports Gigabit LAN
6. Integrated ALC662 HD Audio CODEC with 6-CH
7. Support Watchdog Technology
8. Support CPU Smart FAN
9. Support Power onboard

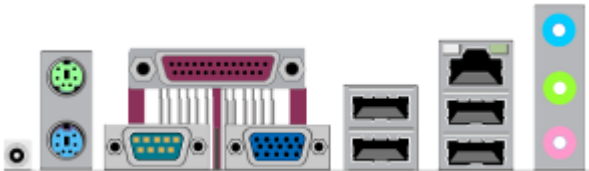

Board Specifications

■ CPU	<ul style="list-style-type: none"> ■ INTEL[®] Processor Single-Core D410 CPU (45nm,1.66GHz,512MB L2 Cache) ■ INTEL[®] Processor Dual-Core D510 CPU (45nm,1.66GHz,1024MB L2 Cache)
■ Chipset	<ul style="list-style-type: none"> ■ INTEL[®] Processor D510/D410 + NM10 ■ Front Side Bus 667MHz
■ Memory	<ul style="list-style-type: none"> ■ 2 * 240-pin DIMM Sockets for un-buffered Dual Channel DDR2 800/667 SDRAM up to 4 GB
■ Expansion Slots	<ul style="list-style-type: none"> ■ 1 * PCI slot
■ Storage	<ul style="list-style-type: none"> ■ 4 * Serial ATA2 3Gb/s connectors ■ 1 * IDE connector
■ Audio	<ul style="list-style-type: none"> ■ Realtek ALC662 6-Channel HD Audio CODEC
■ Ethernet LAN	<ul style="list-style-type: none"> ■ RTL8111DL Gigabit LAN
■ USB	<ul style="list-style-type: none"> ■ Embedded 10 * USB 2.0/1.1
■ Special Features	<ul style="list-style-type: none"> ■ Intel Processor ■ Support DC FAN ■ Support CPU Smart Fan
■ Rear Panel I/O	<ul style="list-style-type: none"> ■ 4 * USB 2.0/1.1 ports ■ 1 * PS/2 Mouse & 1 * Keyboard connector ■ 1 * RJ-45 port ■ 3 * Audio I/O ports (Line-in, mic and line-out) ■ 1 * VGA port ■ 1 * COM port ■ 1 * Parallel port ■ 1 * 12V DC in
■ Internal I/O	<ul style="list-style-type: none"> ■ 3* USB 2.0/1.1 headers for 6 USB 2.0 ports ■ 3 * NB / Chassis Fan connectors; ■ 1 * 4-pin Power connector ■ 1 * LVDS header/ 1* CD IN /1 * GPIO ■ 1 * AUDIO header ■ 1* RS232/RS422/RS485 connector ■ 1 * MINI PCI-E connector
■ BIOS	<ul style="list-style-type: none"> ■ AMI 8MB DPI Flash ROM
■ Functional	<ul style="list-style-type: none"> ■ ATM, Automation, Medical Equipment, Security, Networking, POS, General Application, Gaming Machine, Transportation
■ Packing	<ul style="list-style-type: none"> ■ Color Box Dimension : 200(W) x 200(D) x 70(H)mm
■ Certificate	<ul style="list-style-type: none"> ■ CE, FCC, RoHS
■ Temperature	<ul style="list-style-type: none"> ■ Operating within 0~60 centigrade ■ Storage within -20-85 centigrade
■ Form Factor	<ul style="list-style-type: none"> ■ Mini ITX Form Factor (17cmx17cm)

*For further information please visit the website at <http://www.jetwaycomputer.com>

*The Specification may be changed without further notice.



Product Accessories

Manual	CD	SATA Cable	IO Shield
 <p>USER'S MANUAL</p>		 <p>x1</p>	